

DELOS CIRCADIAN SWITCH

The Delos Circadian Switch is a Bluetooth-enabled switch that allows for easy control of the Delos Circadian Downlights. The switch is retrofitted on top of your existing wall switch and allows for easy access to the manual wall switch when required.



DETAILED SPECIFICATIONS CIRCADIAN SWITCH:

Dimensions (mm)	86 x 66 x 12.8
Weight	48.6g
Number of button connections	64 (simultaneous)
Colour	White
Material	Polycarbonate PC
Power consumption	900mA max & 250mA standby
Operating temperature	-5° C ~ +50° C
Ingress protection	IP40
Network	Wifi (802.11b/g/n), Ethernet, Bluetooth (Bluetooth 4.0 & Bluetooth Low Energy)
Frequency band	2402-2480MHz
Wifi & BT range	Up to 50m
IR range	Up to 5m
Software Requirements	Flic mobile app (setup only)
iOS	iOS 11 or later
Android	8 or later
Warranty	2 years

INSTALLATION:

Button. Logo placement area on surface 22mm diameter.

Bezel. Hard ABS/PC plastic.


Custom designed PCB including BLE chip.

Large CR 2032 Battery.

Base. Hard ABS/PC plastic.

Reusable adhesive for attaching to any surface.

Metal clip.

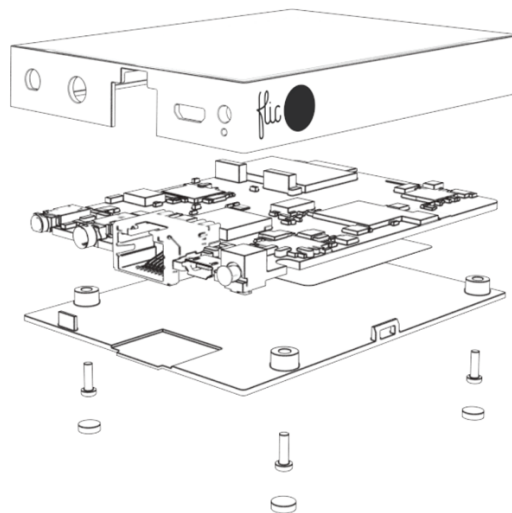

LAN/WAN - Ethernet


LED - Hub status

IR accessory - 2.5mm

Reset switch


Line out - 3.5mm

Power - Micro USB





1. Place the location plate back into the Circadian Switch cover with the exposed double sided tape facing outwards

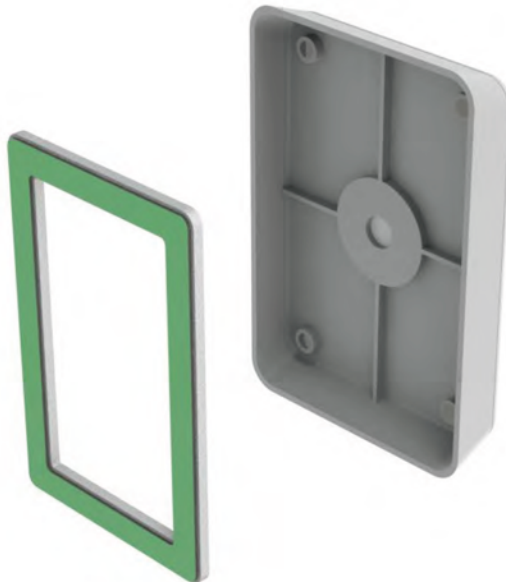

2. Place the Circadian Switch cover over the top of your existing switch, then firmly press firmly for 5 - 10 seconds.



3. Remove the Smart Button from the packaging



4. Peel the protective layer off the double sided tape on the back of the Smart Button.



5. Locate the Smart Button within the Circadian Switch cover button recess then press firmly for 5 - 10 seconds.



6. Remove the Smart Button from the packaging



7. Peel the protective layer off the double sided tape on the back of the Smart Button.



8. Locate the Smart Button within the Circadian Switch cover button recess then press firmly for 5 - 10 seconds.

DELOS CIRCADIAN MINI SWITCH

The Delos Circadian Mini Switch is a Bluetooth-enabled switch that allows for easy control of the Delos Circadian Downlights. The switch can be easily attached to any surface to enable easy access of circadian lighting control.



DETAILED SPECIFICATIONS CIRCADIAN MINI SWITCH:

Battery life	Up to 24 months
Bluetooth range	Up to 50m
Triggers	Click, Double click, hold
Feedback colour	Red LED
Dimensions (mm)	8.30 x 29 (diameter)
Weight	7g
Water resistance	Splash proof (IP54)
Material	PC/ABS material with soft touch coating
Attachment mechanism	Reusable adhesive for attaching to any surface
Warranty	Battery (6 months), Unit (24 months)

Installation:

